



## **Technical Data Sheet**

# BLD03/50I

Blood Leak Detector

Original

Revision: 1.2L | 2022-06-07

## General

## Description

The Blood Leak Detector BLD03/50l is a non-invasive, optical sensor designed to detect smallest amounts of blood in a clear fluid through an optical transparent and flexible tubing.

The BLD03/50I consists of a sensor head with connection line and an external electronic board (PCB) with integrated firmware.

The sensor is developed as a built-in component integrated into a medical device.

## Scope of delivery

	Article number
Set BLD03/50I, class A Including:	700 01 0408
Sensor head BLD03/50	200 05 0008
PCB BLD03I, programmed, class A	200 01 0338



Revision: 1.2L | 2022-06-07



## Sensor Head BLD03/50




Technical data			
Measuring method	Optical transmission measurement, LED		
Specification	Sensor head BLD03/50 - channel width 5.0 mm		
Order number	200 05 0008		
Materials	Housing: ABS and glass Potting: PUR (transparent)		
Measuring channel	Width: 5.0 mm; Height: 5.8 mm		
Mounting	Two mounting holes (Ø = 3.25 mm)		
	① The sensor must be installed on a plane surface.		
Operating temperature	+5 °C +50 °C		
Storage temperature	-20 °C +80 °C		
Working humidity	20 % 75 % relative humidity (not condensing)		
Storage humidity	10 % 90 % relative humidity (not condensing)		
Protection	IP67 (Sensor head without connector)		
Requirements for tube	Tube is inserted into sensor without any coupling fluid.		
① Please provide us	Tube must always be inserted completely into sensor channel.		
with a sample of the tube (approx. 30 cm), so that we can test the usability of your tube.	▲ WARNING  Make sure that the tube remains in position and will not slide out of the sensor channel while operation.		
Outer diameter	5.5 7.0 mm		
Wall thickness	≤ 1.25 mm		
Material	Plastics, e.g. PVC, PE, silicone, PUR, other materials on request		

Tec	٦hn	ica	l data


Special features	Tube must be optically transparent within the spectral range of about 415 nm
Elasticity	Tube must be able to adjust flexibly
Liquid requirements	Optically transparent liquids
Cable	Sensocord®-M-UL, 5 × AWG 28, unshielded, black, Length: 500 mm ± 20 mm
Connector	Molex PicoBlade 51021-0500, Single Row, 5 circuits, 1.25 mm
Directives/Standards	The sensors were developed to be tested with respect to the following standards:
	<ul> <li>Safety requirements: IEC 60601-2-16:2018</li> <li>EMC: IEC 60601-1-2:2014 (4th edition) + AMD1:2020</li> </ul>
Scope of delivery	Sensor Head BLD03/50 (connection cable included) Technical data sheet
Labelling	Each sensor head is labelled with its part number and unique serial number

## **Technical drawing**

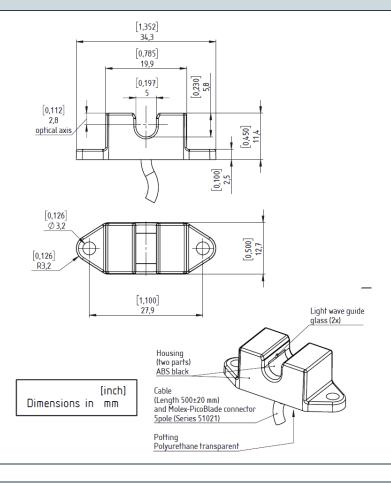



## Printed Circuit Board BLD03I



Technical data	
Measuring method	Optical transmission measurement
Specification	Printed Circuit Board BLD03I V1.1, FW V04.05
Order number	200 01 0338
Blood threshold (adjustable)	Light attenuation of 8 % compared to the calibrated light intensity (default setting)
	① Adjusting the blood threshold will have direct impact on blood sensitivity.
Blood sensitivity	At blood threshold of 8 % (default setting): Reliable detection of a blood leakage ≥ 0.35 ml/min at a dialysis fluid flow rate of 800 ml/min, haematocrit level of 32 %.
	<ul> <li>Blood sensitivity is depending on tube properties, application, process characteristics and blood threshold.</li> </ul>
Measurement accuracy	± 1 %
Response time for blood alarm (adjustable)	Time that passes before a blood alert is actually issued in case of a blood contamination.  280 ms ± 10 ms (default setting)
Response time for plausibility test	Time that passes before a plausibility alert is actually issued in case of a non-plausible signal.  550 ms ± 20 ms
Operating voltage	+3.1 (-1.5 %) +5.5 (+2 %) VDC with a ripple lower than 25 mVpp
	① No overvoltage protection and no reverse polarity protection implemented.  Appropriate protective measures must be taken on the medical device side.
Current consumption	≤ 40 mA without additional load
	① The power supply must be limited to maximum current of 200 mA by means of suitable equipment in the machine (fuse / regulator / etc.).

Technical data	
Max. output current	± 50 mA
	① Stresses beyond the maximum rating may cause permanent damage to the device.
Safety aspects	Self-test – A self-test routine can be triggered via digital input.
Operating temperature	+5 °C +50 °C
Storage temperature	-20 °C +80 °C
Working humidity	20 % 75 % relative humidity (not condensing)
Storage humidity	10 % 90 % relative humidity (not condensing)
Directives/Standards	The sensors were developed to be tested with respect to the following standards:
	<ul> <li>Safety requirements: IEC 60601-2-16:2018</li> <li>EMC: IEC 60601-1-2:2014 (4th edition) + AMD1:2020</li> <li>Software is developed acc. to IEC 62304:2006 + AMD1:2015 The embedded software is classified as "A"</li> </ul>
Scope of delivery	PCB BLD03I V1.1, FW V04.05 Technical Data Sheet Operating Manual Serial interface Description
Labelling	Each Printed Circuit Board is labelled with its product number and its unique serial number

6 / 10 Revision: 1.2L | 2022-06-07



## **Electrical Connection**

## **ATTENTION**

The board needs to be protected against unintended contact with other conductive parts.

J2 – Connection to	Sensor Head		
Connector	Board conr	ector header; 5-pin; 1.25 mm	Molex: 53261-0571
Assignment	Pin	Connection	
	1	GND	
	2	VDD	
	3	SDA of I <sup>2</sup> C	
	4	SCL of I <sup>2</sup> C	5 4 3 2 1
	5	LED+	_

J3 – Serial Interface			
Connector	Board connector	header; 4-pin; 1.25 mm	Molex: 53261-0471
Assignment	Pin	Connection	
	1	Supply voltage 3.1 5.5 VDC	1 2 3 4
	2	GND	
	3	Тх	
	4	Rx	
Serial interface	Parameter	Value	
	Bits per second	115200	
	Data bits	8	
	Parity	none	
	Stop bits	1	
	Flow control	none	

J4 - Logical Int	terface				
Connector	Board	Board connector header; 6-pin; 1.25 mm Molex: 53261-0671			
Assignment	Pin	Pin Function			
	1	Supply voltage 3.1 5.5 VDC	1 2 3 4 5 6		
	2	GND			
	3	Output "Blood"			
	4	Input "Self-Test" (high active)			
	5	Output "Plausibility"			
	6	Input "Calibration" (high active)			

8 / 10 Revision: 1.2L | 2022-06-07



Logical specification	Output	Signal level	Condition
Signal at	Blood Plausibility	High	Blood
output		Low	No blood (clear liquid)
		High	No plausibility error nor device error
		Low	Plausibility error or device error


① The logical output signal of "Plausibility" has the highest priority, thus signals on the logical output "Blood" are only valid if the logical output "Plausibility" is set to high.

Logical specification	Input	Signal level	Condition
Signal at input	Self-Test	High	Start self-test
		Low	-
	Calibration	High	Start calibration
		Low	-

① The logical input signal of "Calibration" has the highest priority, thus a self-test will be started only if the logical input "Self-Test" is high and the logical input "Calibration" is low.

Logical level	Parameter	Condition	Operating voltage V <sub>cc</sub>	Min	Тур	Max	Unit
Signal at output	Output V <sub>он</sub> High Voltage	I <sub>OH</sub> = -100 μA I <sub>OH</sub> = -16 mA I <sub>OH</sub> = -24 mA I <sub>OH</sub> = -32 mA	3.1 5.5 V 3.1 V 3.1 V 4.5 V	Vcc-0.1 2.4 2.3 3.8	 	  	V V V
	Output V <sub>OL</sub> Low Voltage	I <sub>OL</sub> = 100 μA I <sub>OL</sub> = 16 mA I <sub>OL</sub> = 24 mA I <sub>OL</sub> = 32 mA	3.15.5 V 3.1 V 3.1 V 4.5 V	  	 	0.1 0.4 0.55 0.55	V V V
Signal at input	Input V <sub>IH</sub> High Voltage		3.1 5.5 V	2.0			V
	Input V <sub>IL</sub> Low Voltage		3.1 5.5 V			0.8	V

#### **Technical drawing**

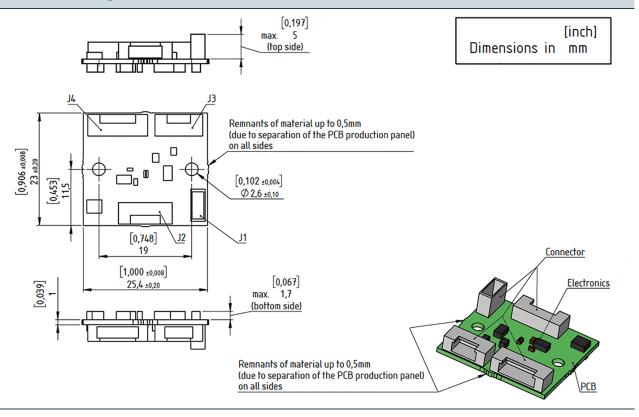

Drawings are not to scale. Dimensions in mm, unless otherwise specified. Information is subject to change without notice. SONOTEC is a registered trademark.

#### Manufacturer

SONOTEC GmbH Nauendorfer Str. 2 06112 Halle (Saale) Germany

Tel.: +49 345 13317-0 sonotec@sonotec.de www.sonotec.de

#### **Contact USA**

SONOTEC US Inc. 190 Blydenburgh Rd Suite 8, 2nd Floor Islandia, New York 11749, USA

Tel.: +1 631 4154758 sales@sonotecusa.com www.sonotecusa.com

10 / 10

Revision: 1.2L | 2022-06-07

